FOR FUTURE USE AND REFERENCE

RETAIN THIS INSTRUCTION SHEET AND THE CRIB TOOLS IN THE ORIGINAL SACK AND SECURE IT TO THE SPRING UNDER THE MATTRESS WITH PLASTIC TIES.

CARE INSTRUCTIONS: The natural warmth of wood is a lasting value. Character marks, checking and grain variations are part of the beauty of wood and, therefore, should not be a concern. If treated with care, this solid wood product will last you for many years to come. Once every week, wipe your Baby's Dream furniture with Pledge®, lemon oil or other similar wood treatment products. If you encounter any roughness in the finish of your new crib, fold a piece of regular white paper—not tissue or newspaper—and rub it gently against the surface until the desired smoothness is achieved. If refinishing, use a non-toxic finish specified for children's products, Let dry. sand with a very fine product such as folded paper or dishing washing sponge and, finally, apply water-based babysafe lacquer for the perfect matching shine.

To insure your child's safety and for your own peace of mind, be sure to follow instructions properly. Failure to follow these warnings and assembly instructions could result in serious injury or death. Before each usage or assembly, inspect the crib for

damaged hardware, loose joints, missing parts or sharp edges.

- **DO NOT** use the crib if any parts are missing or broken.
- DO NOT substitute parts. Ask your dealer or write to Baby's Dream Furniture for replacement parts and instructional literature if needed.
- ✓ Make sure that all bolts and screws are properly tightened. DO NOT over- or under-tighten.
- AVOID STRANGULATION: As soon as an infant can sit or stand up, close the crib gate or raise the Drop Front permanently.
- **DO NOT** place the crib near a window where cords from blinds or drapes may strangle a child.
- **DO NOT** tie pacifiers, necklaces or any other items around a child's neck or on the crib parts.

Strings can cause strangulation! Do not place items with string around a child's neck, such as hood strings or pacifier cords. Do not suspend strings over a crib or attach string toys.

- NEVER use plastic shopping bags or other film as mattress covers, because they can cause suffocation.
- For a newborn, adjust the spring on the highest level of the Height Adjuster and open the gate or lower the Drop Front for easy access.
- **DO NOT** leave a child in a crib with an open gate or lowered Drop Front. Be sure the gate is closed or the Drop Front is raised and locked in position whenever the child is in the crib. After closing the gate or raising the Drop Front, make sure the latches are secure.
- ✓ The child must be seated at the rear of the crib when lowering or raising the gate or Drop Front.
- As your child grows, adjust the height of the spring down so that he/she cannot pull himself/herself out of the crib. When the child is able to pull to a standing position, set the mattress to the lowest position and remove bumper pads, large toys and other objects that could serve as steps for climbing out. When the child is able to climb out or reaches the height of 35" (90cm), the bed should no longer be used in the form of a crib. You can continue to use this crib as a youth or toddler bed for another 2 to 3 years by using the Youth Bed **Conversion Kit.**

ANY MATTRESS USED IN THIS CRIB MUST BE AT LEAST 271/4" X 515/8" WITH A THICKNESS NOT EXCEEDING 6". DO NOT USE A WATER MATTRESS WITH THIS CRIB.

This crib conforms to the applicable regulations promulgated by the Consumer Product Safety Commission.



This product may be covered by one or more of the following patents: D366,778; D366,970,5,077,846 and other patents pending.





www.babysdream.com





"Belle™" Instruction Sheet

Read All Instructions Before Assembling Crib. Keep Instructions For Future Use. Check Box For All Parts.

A PHILLIPS HEAD SCREWDRIVER IS REQUIRED

100mm Bolt

70mm Bolt

60mm Bolt

Screw for Bracket

Metal Bracket

PARTS LIST

- Back Frame
- Front Frame with Gate attached
- Gate/attached to Front Frame
- **End Frames** (2)
- (1) Youth Rail
- Front Posts with Strike Plates
- **Back Posts** (2)

PARTS LIST (WITH ADULT CONVERSION)

- Side Rails
- (2) **Short Posts**

HARDWARE LIST

- 70mm Bolts
- 60mm Bolts (8)
- (4) 100mm Bolts
- (6)Tension Pins
- Spring (Mattress Support)
- Spring Bolts
- Trigger Latches (attached to Gate)
- (2) Strike Plates (attached to Front Post)
- Allen Wrench
- Hex Wrench

HARDWARE LIST (WITH ADULT CONVERSION)

- Steel Pins
- Metal Brackets
- (32) Screws for Brackets











Front Posts

Steel Pin



Spring Bolts




Strike Plate

Allen Wrench


Hex Wrench



Gate attached to Front Frame




Side Rails




Mattress Support


CRIB ASSEMBLY INSTRUCTIONS

Step 1: To begin assembly you will need the two Back Posts and your Back Frame. You need two 100mm Bolts and two 70mm Bolts to connect the Back Posts to the Back Frame. The 70mm Bolts will be used at the top and the 100mm Bolts will be used at the bottom. Make sure that the bolts are not tightened until the Back Frame is completely dropped as far as it will go. Tighten all bolts at this time using your Allen Wrench.

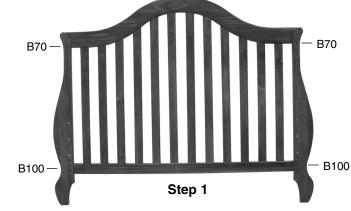

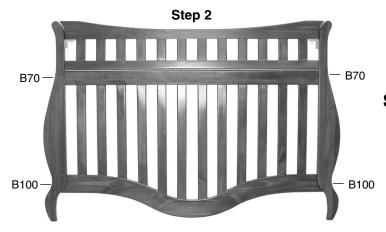

Step 2: To attach the Front Posts to the Front Frame you will need the other two 100mm Bolts and the other two 70mm Bolts. You will need to attach the Front Posts to the Front Frame with gate.








Step 4: Repeat Step 3 to attach the front assembly to the End Frames. Make sure that the gate folds to the outside of the crib. With the front dropped to the bottom of the bolt holes you can now tighten the bolts. Make sure that the gate locks properly in the latched position.

Step 5: You must now attach the Spring (Mattress Support) to the crib. Depending on several factors you must decide which level you want the spring attached. You must always set the spring at the lowest level when a child is able to stand or pull his/her self up. To attach the spring you will need four Spring Bolts and your Hex Wrench. Insert the bolts through the spring arm and into the inserts located in the posts.

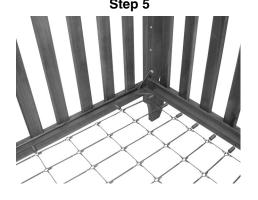

YOUTH BED WITH GUARD RAIL

STARTING FROM CRIB:

- **Step 1:** Lower the Mattress Support to lowest position.
- Step 2: Remove Front Frame from crib.



- **Step 3:** Remove Gate from Front Frame by removing the screws from the Hinge attached to the Gate.
- **Step 4:** Insert the Tension Pins into the small holes in the ends of the Gate Frame. Tap the pins into the holes using a hammer (the pins must be tapped in half way only).
- **Step 5:** For the Youth Rail you must insert the Tension Pins into both holes in each end and tap them half way in with a hammer.
- **Step 6:** Insert the Tension Pins of the Gate and Youth Rail into the holes in the posts and insert and tighten two 100m Bolts to lock the front together.
- **Step 7:** Remove the Trigger Latches from the Gate and the Strike Plates from the posts.



STARTING FROM SCRATCH:

- **Step 1:** Follow Steps 1 and 3 of the crib assembly instructions.
- **Step 2:** Attach the Front Posts to the End Frames.
- **Step 3:** Follow Steps 1 through 7 of the Youth Bed with Guard Rail (from crib) instructions.

ADULT BED WITH ADULT RAILS FROM YOUTH BED

- **Step 1:** Attach the Short Posts to the Front Frame with gate removed.
- **Step 2:** Leave the Back Frame attached to the Back Posts.
- **Step 3:** To attach the Adult Rails you must first insert the Steel Pins into the large diameter holes located in the ends of the Adult Rails.
- **Step 4:** Next you must bolt the rails through the posts and into the inserts located in the ends of the Side Rails using 60mm Bolts. (Tighten) Make sure that the cleat on the Adult Rail is at the top side as shown in the photo.
- **Step 5:** The optional brackets can be used at this time. The Bracket Mounting instructions are with the brackets.

ADULT BED FROM SCRATCH:

- **Step 1:** Follow Step 1 from crib assembly.
- Step 2: Follow Steps 1 through 5 of Adult Bed from Youth Bed.

