

FOR FUTURE USE AND REFERENCE
RETAIN THIS INSTRUCTION SHEET AND THE CRIB TOOLS IN THE ORIGINAL SACK
AND SECURE IT TO THE SPRING UNDER THE MATTRESS WITH PLASTIC TIES.

CARE INSTRUCTIONS: The natural warmth of wood is a lasting value. Character marks, checking and grain variations are part of the beauty of wood and, therefore, should not be a concern. If treated with care, this solid wood product will last you for many years to come. Once every week, wipe your Baby's Dream furniture with Pledge®, lemon oil or other similar wood treatment products. If you encounter any roughness in the finish of your new crib, fold a piece of regular white paper—not tissue or newspaper—and rub it gently against the surface until the desired smoothness is achieved. If refinishing, use a non-toxic finish specified for children's products. Let dry, sand with a very fine product such as folded paper or dish washing sponge and, finally, apply water-based baby-safe lacquer for the perfect matching shine.

WARNING! To insure your child's safety and for your own peace of mind, be sure to follow instructions properly. Failure to follow these warnings and assembly instructions could result in serious injury or death. Before each usage or assembly, inspect the crib for damaged hardware, loose joints, missing parts or sharp edges.


- ✓ **DO NOT** use the crib if any parts are missing or broken.
- ✓ **DO NOT** substitute parts. Ask your dealer or write to Baby's Dream Furniture for replacement parts and instructional literature if needed.
- ✓ Make sure that all bolts and screws are properly tightened. **DO NOT** over- or under-tighten.
- ✓ **AVOID STRANGULATION:** As soon as an infant can sit or stand up, close the crib gate or raise the Drop Front permanently.
- ✓ **DO NOT** place the crib near a window where cords from blinds or drapes may strangle a child.
- ✓ **DO NOT** tie pacifiers, necklaces or any other items around a child's neck or on the crib parts.

WARNING! Strings can cause strangulation! Do not place items with string around a child's neck, such as hood strings or pacifier cords. Do not suspend strings over a crib or attach string toys.

- ✓ **NEVER** use plastic shopping bags or other film as mattress covers, because they can cause suffocation.
- ✓ For a newborn, adjust the spring on the highest level of the Height Adjuster and open the gate or lower the Drop Front for easy access.
- ✓ **DO NOT** leave a child in a crib with an open gate or lowered Drop Front. Be sure the gate is closed or the Drop Front is raised and locked in position whenever the child is in the crib. After closing the gate or raising the Drop Front, make sure the latches are secure.
- ✓ The child must be seated at the rear of the crib when lowering or raising the gate or Drop Front.
- ✓ As your child grows, adjust the height of the spring down so that he/she cannot pull himself/herself out of the crib. When the child is able to pull to a standing position, set the mattress to the lowest position and remove bumper pads, large toys and other objects that could serve as steps for climbing out. When the child is able to climb out or reaches the height of 35" (90cm), the bed should no longer be used in the form of a crib. You can continue to use this crib as a youth or toddler bed for another 2 to 3 years by using the **Youth Bed Conversion Kit**.

ANY MATTRESS USED IN THIS CRIB MUST BE AT LEAST 27 1/4" X 51 5/8" WITH A THICKNESS NOT EXCEEDING 6". DO NOT USE A WATER MATTRESS WITH THIS CRIB.

This crib conforms to the applicable regulations promulgated by the Consumer Product Safety Commission.



This product may be covered by one or more of the following patents: D366,778; D366,970,5,077,846 and other patents pending.

BABY'S DREAM
FURNITURE, INC.

Buena Vista, GA 31803-0579
 www.babysdream.com



"Karla™" Instruction Sheet

Read All Instructions Before Assembling Crib. Keep Instructions For Future Use.

A PHILLIPS HEAD SCREWDRIVER IS REQUIRED

PARTS LIST

- (1) Back Frame
- (1) Front Frame
- (2) End Frames
- (2) Front Posts
- (2) Back Posts
- (1) Youth Rail

HARDWARE LIST

- (8) 60mm Bolts
- (8) 80mm Bolts
- (4) Spring Bolts
- (2) Tension Pins
- (1) Spring (Mattress Support)
- (1) Allen Wrench
- (1) Hex Wrench

HARDWARE LIST (ADULT BED)

- (4) Brackets
- (32) Screws
- (4) Steel Pins (not needed)



Back Frame



Front Frame



End Frame




Front Posts

Back Posts



Youth Rail



80mm Bolt

60mm Bolt



Tension Pin




Small Spring Bolts



Allen Wrench



Hex Wrench

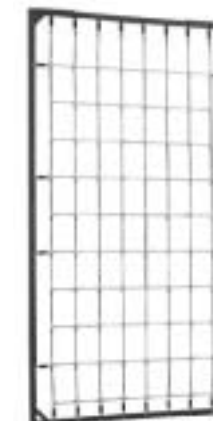

Mattress Support

CRIB ASSEMBLY INSTRUCTIONS

Step 1: To begin assembly you will need your Back Posts and your Back Frame. You will need four 80mm Bolts. Attach the Back Posts to the Back Frame using the 80mm Bolts and your Allen Wrench. (This is your back assembly).



Step 2: Next you need the two Front Posts and your Front Frame. Using four 80mm Bolts and your Allen Wrench, attach the Front Posts to the Front Frame. (This is your front assembly).



Step 3: Next you need your front and back assemblies and your two End Frames. Using four 60mm Bolts and your Allen Wrench, you can attach one End Frame to the front and back assemblies. Repeat this step for the other End Frame with the other four 60mm Bolts.



Step 4: Next you must install your Spring (Mattress Support) in the desired height adjustment. The Spring Bolts must be inserted through the arms of the spring and into the inserts located in the posts. Tighten using the supplied Hex Wrench.

YOUTH BED INSTRUCTIONS

Step 1: Remove Front Frame from crib.

Step 2: Hammer Tension Pins halfway into the small holes in the Youth Rail.

Step 3: Using two 80mm Bolts you can now mount the Youth Rail as shown in the photo.

Step 4: The Spring (Mattress Support) must be mounted in the lowest position for the Youth Bed.



ADULT BED INSTRUCTIONS

Step 1: Remove the Mattress Support from the crib.

Step 2: Remove the End Frames from the crib.

Step 3: Remove the bolts from the Front Frame assembly and invert the Front Frame. Use the bolts to re-attach the Front Frame.

Step 4: To attach the wooden Adult Rails to the front and back assemblies you will need your eight 60mm Bolts from your crib hardware. The rails must be mounted with the cleat (long block of wood) on the top side. The Box Springs or Bunkie Board will sit on top of this cleat. Insert the bolts through the post and into the inserts located in the ends of the Adult Rails. Tighten using your Allen Wrench. See photo. (This hardware package also contains four Steel Pins not needed for this adult conversion. Please throw away!)

